

**1** MBS46A

**350W 230V Horizontal/Vertical Metal Cutting Bandsaw**

**No-volt switch**


A versatile three-speed machine offering horizontal and vertical cutting capabilities. Designed for use in the maintenance workshop. The 350W motor gives smooth and accurate saw blade transmission through the adjustable ball bearing guides. Supplied complete with transport wheels, tool shelf, plastic blade guards and BS safety regulation guard. Push button on/off switch and BS approved non-rewireable 3 pin moulded plug and cable. Carton packed.

**Specification:**

Cutting capacity	... 114mm round 100 x 150mm rectangular
Motor type	... induction
Blade length	... 1638mm
Vertical table size	... 254 x 250mm
Height to bed	... 610mm
Height to table	... 860mm
Speeds (rpm)	... 3 (65, 95, 165)
Weight	... 61kg

Stock No.	Box Qty	Price each
30736	-	€396.91P

**HORIZONTAL AND VERTICAL CUTTING**

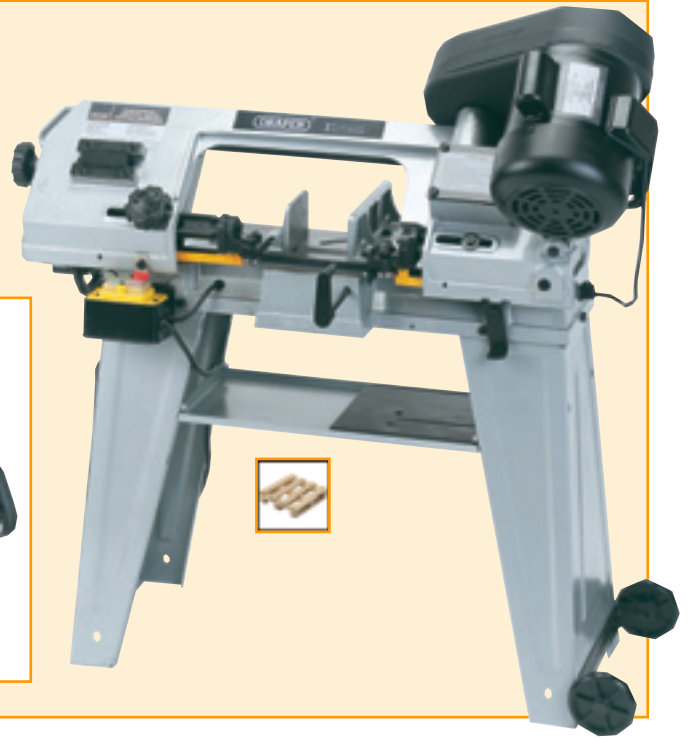

**2** FS16S

**400mm 85W 230V Fretsaw**

**No-volt switch**

Steel base and table with parallel action arm design which allows quick and accurate cuts. The dust blower keeps the cutting line clear and a dust extraction facility removes unwanted dust when connected to a dust extractor. The worktable tilts from 0-45°. Uses 127mm pin end fretsaw blades. Fitted with BS approved non-rewireable 3 pin moulded plug and cable. Display carton.

**Specification:**

Maximum thickness of cut at 90°	... 50mm
Maximum thickness of cut at 45°	... 20mm
Throat depth	... 400mm
Blade length	... 127mm
Cuts per minute	... 1400
Stroke	... 15mm
Table size	... 410 x 253mm
Table tilt	... 0-45°
Base dimensions	... 400 x 216mm
Weight	... 22kg

Stock No.	Box Qty	Price each
89334	-	€113.66P



**3** FS450V

**405mm 90W 230V Variable Speed Fretsaw with Flexible Drive Shaft and Worklight**

**No-volt switch**

Aluminium table with parallel action arm design which allows quick and accurate cuts. Incorporates a worklight and flexible shaft suitable for use with Draper Multi-Tool accessories. The dust blower keeps the cutting line clear and a dust extraction facility removes unwanted dust when connected to a dust extractor. The worktable tilts from 0-45°. Uses 127mm pinless fretsaw blades. Fitted with BS approved non-rewireable 3 pin moulded plug and cable. Display carton.

**Specification:**

Maximum thickness of cut at 90°	... 50mm
Maximum thickness of cut at 45°	... 20mm
Throat depth	... 405mm
Blade length	... 127mm
Stroke Speed	... 550-1600p/min
Stroke	... 20mm
Flexible shaft speed	... 3000-10,000r/min
Table size	... 415 x 255mm
Table tilt	... 0-45°
Base dimensions	... 400 x 216mm
Weight	... 22kg

Stock No.	Box Qty	Price each
22791	-	€183.07P

**FLEXIBLE DRIVE SHAFT ACCESSORIES**

Accessories for use with the Flexible Drive Shaft on Fretsaw Stock No. 22791 (Item No. 3) are shown on page 556

