


air line fittings

NEW
NOW IN
NEW
LENGTHS

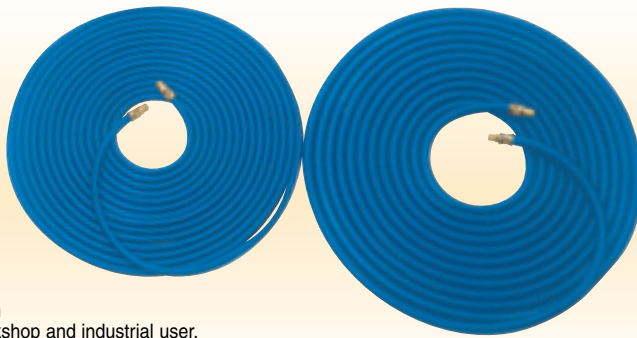

Straight Line Air Hoses

Generally in accordance with BS EN ISO 2398 Specification

PVC air line hoses for the workshop and industrial user, supplied complete with zinc plated fittings. Display packed.

Stock No.	Part No.	Internal Diameter	Length (Working)	Connection	Max. Working Pressure	Diameter internal x external	Box Qty	Price each
14272	4305	6mm	5M	1/4" BSP Male	1.6MPa (232psi)	6 x 14mm	-	€11.74D
14273	4310	6mm	10M	1/4" BSP Male	1.6MPa (232psi)	6 x 14mm	-	€18.60D
36939	4306	6mm	15.2M	1/4" BSP Male	1.6MPa (232psi)	6 x 14mm	-	€29.81D
14274	4320	6mm	20M	1/4" BSP Male	1.6MPa (232psi)	6 x 14mm	-	€32.38D
14275	4305	8mm	5M	1/4" BSP Male	1.6MPa (232psi)	8 x 16mm	-	€12.58D
36940	4307	8mm	15.2M	1/4" BSP Male	1.6MPa (232psi)	8 x 16mm	-	€32.74D
14276	4305	10mm	5M	1/4" BSP Male	1.6MPa (232psi)	10 x 18mm	-	€15.29D
14277	4310	10mm	10M	1/4" BSP Male	1.6MPa (232psi)	10 x 18mm	-	€24.31D
36941	4308	10mm	15.2M	1/4" BSP Male	1.6MPa (232psi)	10 x 18mm	-	€38.78D
14278	4320	10mm	20M	1/4" BSP Male	1.6MPa (232psi)	10 x 18mm	-	€42.31D
14279	4305	13mm	5M	1/2" BSP Male	1.6MPa (232psi)	13 x 21mm	-	€22.39D
36942	4309	13mm	15.2M	1/2" BSP Male	1.0MPa (145psi)	13 x 21mm	-	€47.66D



the safety coupling from PCL

Safeflow fits the standard PCL adaptor profile, and is therefore compatible with most existing equipment and has been manufactured in accordance with safety standards ISO4414:1998 and EN983:1996.


features:

- two stage self-venting release
- conforms to **ISO 4414:1998** and **EN 983:1996**
- enhances workshop safety prevents hose whip
- compatible with genuine PCL Standard Adaptors

benefits:

- safe and simple to use
- genuine PCL product, designed and manufactured in Sheffield, England
- affordable safety solution

OTHER PCL
FITTINGS ARE
SHOWN ON
PAGES 590-593

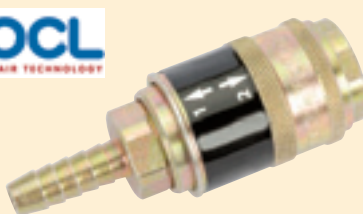

1

PCL 'safeflow' Couplings (sold loose)

Enhanced fitting with two stage self-venting release. Prevents hose-whip and creates safe compressed air environment. Female BSP parallel and male taper types available. Maximum airflow rate 1225L/min (43cfm) at 6.9bar (100psi). Maximum working pressure 13.8bar (200psi) Sold loose.

Stock No.	Part No.	Thread Size	Thread Type	Box Qty	Price each
41879	ASC21CF	1/4"	Female	-	€14.62D
41881	ASC21CM	1/4"	Male	-	€14.62D
41883	ASC21EF	3/8"	Female	-	€20.62D
41885	ASC21EM	3/8"	Male	-	€20.62D
41887	ASC21JF	1/2"	Female	-	€20.90D
41889	ASC21JM	1/2"	Male	-	€20.90D

2

PCL 'safeflow' Coupling Tailpieces (sold loose)

Enhanced fitting with two stage self-venting release. Prevents hose-whip and creates safe compressed air environment. Female BSP parallel and male taper types available. Maximum airflow rate 1225L/min (43cfm) at 6.9bar (100psi). Maximum working pressure 13.8bar (200psi). Sold loose.

Stock No.	Part No.	Thread	Box Qty	Price each
41891	ASC21R	1/4"	-	€20.62D
41893	ASC21S	5/16"	-	€20.62D
41895	ASC21T	3/8"	-	€20.62D

section 12

DRAPER

air flow regulator




3 A4293

Air Flow Regulator

For use with various air tools (rotary drills, etc.) enabling air flow to be regulated thus allowing greater speed control. Air inlet 1/4" BSP. Air outlet 1/4" BSP. Display packed.

Stock No.	Box Qty	Price each
30038	-	€12.22D

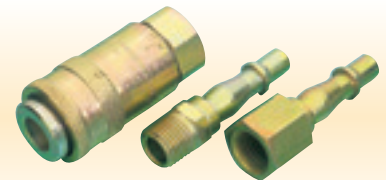

4 ACK2

3 piece 1/4" BSP Air Line Coupling Set

Couplers/adaptors that will allow the user maximum versatility and quick release facility. Display packed.

Contents:

- screw adaptor male thread 1/4" BSP taper
- coupling adaptor female thread 1/4" BSP parallel
- screw adaptor female thread 1/4" BSP taper

Stock No.	Box Qty	Price per set
37844	-	€11.69D



5 4255

Mini Oiler

To keep air tools lubricated. 1/4" BSP thread. Can be used with most of the air tools shown in this Catalogue. Display packed.

Stock No.	Box Qty	Price each
22317	-	€18.12D

Prices are list, each and exclude VAT.