


NEW
NOW IN
NEW
LENGTHS

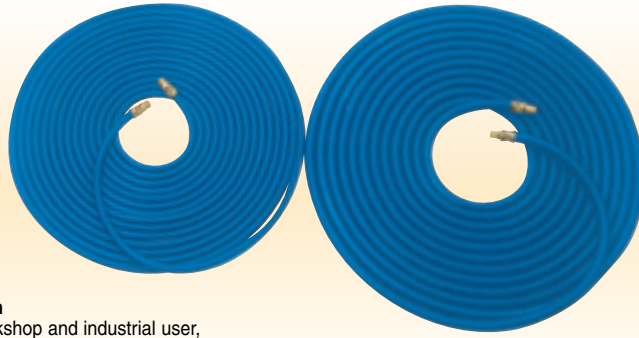

Straight Line Air Hoses

Generally in accordance with BS EN ISO 2398 Specification

PVC air line hoses for the workshop and industrial user, supplied complete with zinc plated fittings. Display packed.

| Stock No. | Part No. | Internal Diameter | Length (Working) | Connection | Max. Working Pressure | Diameter internal x external | Box Qty | Price each |
|-----------|----------|-------------------|------------------|---------------|-----------------------|------------------------------|---------|------------|
| 14272 | 4305 | 6mm | 5M | 1/4" BSP Male | 1.6MPa (232psi) | 6 x 14mm | - | £9.78D |
| 14273 | 4310 | 6mm | 10M | 1/4" BSP Male | 1.6MPa (232psi) | 6 x 14mm | - | £15.50D |
| 36939 | 4306 | 6mm | 15.2M | 1/4" BSP Male | 1.6MPa (232psi) | 6 x 14mm | - | £24.84D |
| 14274 | 4320 | 6mm | 20M | 1/4" BSP Male | 1.6MPa (232psi) | 6 x 14mm | - | £26.98D |
| 14275 | 4305 | 8mm | 5M | 1/4" BSP Male | 1.6MPa (232psi) | 8 x 16mm | - | £10.48D |
| 36940 | 4307 | 8mm | 15.2M | 1/4" BSP Male | 1.6MPa (232psi) | 8 x 16mm | - | £27.28D |
| 14276 | 4305 | 10mm | 5M | 1/4" BSP Male | 1.6MPa (232psi) | 10 x 18mm | - | £12.74D |
| 14277 | 4310 | 10mm | 10M | 1/4" BSP Male | 1.6MPa (232psi) | 10 x 18mm | - | £20.26D |
| 36941 | 4308 | 10mm | 15.2M | 1/4" BSP Male | 1.6MPa (232psi) | 10 x 18mm | - | £32.32D |
| 14278 | 4320 | 10mm | 20M | 1/4" BSP Male | 1.6MPa (232psi) | 10 x 18mm | - | £35.26D |
| 14279 | 4305 | 13mm | 5M | 1/2" BSP Male | 1.6MPa (232psi) | 13 x 21mm | - | £18.66D |
| 36942 | 4309 | 13mm | 15.2M | 1/2" BSP Male | 1.0MPa (145psi) | 13 x 21mm | - | £39.72D |

air flow regulator



3 A4293

Air Flow Regulator

For use with various air tools (rotary drills, etc.) enabling air flow to be regulated thus allowing greater speed control. Air inlet 1/4" BSP. Air outlet 1/4" BSP. Display packed.

| Stock No. | Box Qty | Price each |
|-----------|---------|------------|
| 30038 | - | £10.18D |



the safety coupling from PCL

Safeflow fits the standard PCL adaptor profile, and is therefore compatible with most existing equipment and has been manufactured in accordance with safety standards ISO4414:1998 and EN983:1996.



features:

- two stage self-venting release
- conforms to **ISO 4414:1998** and **EN 983:1996**
- enhances workshop safety prevents hose whip
- compatible with genuine PCL Standard Adaptors

OTHER PCL FITTINGS ARE SHOWN ON PAGES 590-593

benefits:

- safe and simple to use
- genuine PCL product, designed and manufactured in Sheffield, England
- affordable safety solution

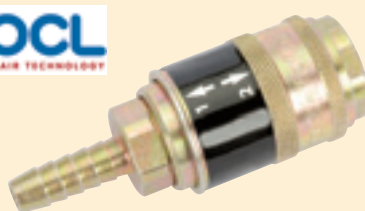

1 PCL 'safeflow' Couplings (sold loose)

Enhanced fitting with two stage self-venting release. Prevents hose-whip and creates safe compressed air environment. Female BSP parallel and male taper types available. Maximum airflow rate 1225L/min (43cfm) at 6.9bar (100psi). Maximum working pressure 13.8bar (200psi) Sold loose.

| Stock No. | Part No. | Thread Size | Thread Type | Box Qty | Price each |
|-----------|----------|-------------|-------------|---------|------------|
| 41879 | ASC21CF | 1/4" | Female | - | £12.18D |
| 41881 | ASC21CM | 1/4" | Male | - | £12.18D |
| 41883 | ASC21EF | 3/8" | Female | - | £17.18D |
| 41885 | ASC21EM | 3/8" | Male | - | £17.18D |
| 41887 | ASC21JF | 1/2" | Female | - | £17.42D |
| 41889 | ASC21JM | 1/2" | Male | - | £17.42D |

2 PCL 'safeflow' Coupling Tailpieces (sold loose)

Enhanced fitting with two stage self-venting release. Prevents hose-whip and creates safe compressed air environment. Female BSP parallel and male taper types available. Maximum airflow rate 1225L/min (43cfm) at 6.9bar (100psi). Maximum working pressure 13.8bar (200psi). Sold loose.

| Stock No. | Part No. | Thread | Box Qty | Price each |
|-----------|----------|--------|---------|------------|
| 41891 | ASC21R | 1/4" | - | £17.18D |
| 41893 | ASC21S | 5/16" | - | £17.18D |
| 41895 | ASC21T | 3/8" | - | £17.18D |

4 ACK2


3 piece 1/4" BSP Air Line Coupling Set

Couplers/adaptors that will allow the user maximum versatility and quick release facility. Display packed.

Contents:

- screw adaptor male thread 1/4" BSP taper
- coupling adaptor female thread 1/4" BSP parallel
- screw adaptor female thread 1/4" BSP taper

| Stock No. | Box Qty | Price per set |
|-----------|---------|---------------|
| 37844 | - | £9.74D |

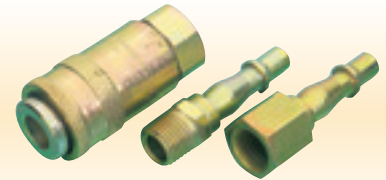

5 4255

Mini Oiler

To keep air tools lubricated. 1/4" BSP thread. Can be used with most of the air tools shown in this Catalogue. Display packed.

| Stock No. | Box Qty | Price each |
|-----------|---------|------------|
| 22317 | - | £15.10D |

Prices are list, each and exclude VAT.