

1

**PCL Euro Couplings**

- For heavy duty high flow applications • BSP parallel • Tested to over 1 million cycles • Connects to most popular and European adaptor profiles (Cejn, Rectus etc.) • Zinc passivated to significantly improve corrosion resistance • Hard wearing steel construction

Sold loose.

Specification:

Flow capacity at 6 bar inlet and 0.5bar pressure drop ... 78cfm (2200L/min)  
 Max. working pressure ... 500psi (35bar)  
 Test pressure ... 725psi (50bar)  
 Max. burst pressure ... 2030psi (140bar)  
 Temp. range ... -40 to 100°C  
 Nominal flow diameter ... 7.4mm

Stock No.	Part No.	Thread Size	Thread Type	Box Qty	Price each
54407	AC71CF	1/4"	Female	-	£12.96D
54404	AC71CM	1/4"	Male	-	£12.96D
54408	AC71EF	3/8"	Female	-	£12.96D
54405	AC71EM	3/8"	Male	-	£12.96D
54409	AC71JF	1/2"	Female	-	£12.96D
54406	AC71JM	1/2"	Male	-	£12.96D



3

**PCL Euro Coupling Hose Tailpieces**

- For heavy duty high flow applications • Tested to over 1million cycles • Connects to most popular and European adaptor profiles (Cejn, Rectus etc.) • Zinc passivated to significantly improve corrosion resistance • Hard wearing steel construction

Sold loose.

Specification:

Flow capacity at 6 bar inlet and 0.5bar pressure drop ... 78cfm (2200L/min)  
 Max. working pressure ... 500psi (35bar)  
 Test pressure ... 725psi (50bar)  
 Max. burst pressure ... 2030psi (140bar)  
 Temp. range ... -40 to 100°C  
 Nominal flow diameter ... 7.4mm

Stock No.	Part No.	Bore Size	For Hose	Box Qty	Price each
54410	AC7106	6mm	6mm	-	£12.96D
54411	AC7108	8mm	8mm	-	£12.96D
54412	AC7110	10mm	10mm	-	£12.96D
54413	AC7113	13mm	13mm	-	£12.96D



2

**PCL Euro Coupling Nut Adaptors**


- For heavy duty high flow applications • Tested to over 1 million cycles • Connects to most popular and European adaptor profiles (Cejn, Rectus etc.) • Zinc passivated to significantly improve corrosion resistance • Hard wearing steel construction

Sold loose.

Specification:

Flow capacity at 6 bar inlet and 0.5bar pressure drop ... 78cfm (2200L/min)  
 Max. working pressure ... 500psi (35bar)  
 Test pressure ... 725psi (50bar)  
 Max. burst pressure ... 2030psi (140bar)  
 Temp. range ... -40 to 100°C  
 Nominal flow diameter ... 7.4mm

Stock No.	Part No.	Thread Size	Type	Box Qty	Price each
54418	A7105	1/8"	F 1/8" BSP	-	£2.96D
54414	A7101	1/8"	M 1/8" BSP	-	£2.96D
54419	A7106	1/4"	F 1/4" BSP	-	£2.96D
54415	A7102	1/4"	M 1/4" BSP	-	£2.96D
54420	A7107	3/8"	F 3/8" BSP	-	£3.38D
54416	A7103	3/8"	M 3/8" BSP	-	£3.22D
54421	A7108	1/2"	F 1/2" BSP	-	£6.12D
54417	A7104	1/2"	M 1/2" BSP	-	£6.12D

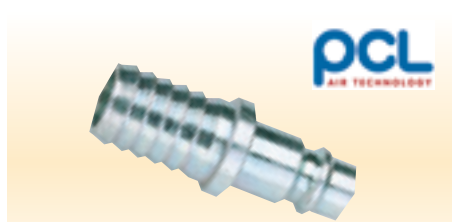

4

**PCL Euro Adaptor Hose Tailpieces**

- For heavy duty high flow applications • Tested to over 1 million cycles • Connects to most popular and European adaptor profiles (Cejn, Rectus etc.) • Zinc passivated to significantly improve corrosion resistance • Hard wearing steel construction

Sold loose.

Specification:

Flow capacity at 6 bar inlet and 0.5bar pressure drop ... 78cfm (2200L/min)  
 Max. working pressure ... 500psi (35bar)  
 Test pressure ... 725psi (50bar)  
 Max. burst pressure ... 2030psi (140bar)  
 Temp. range ... -40 to 100°C  
 Nominal flow diameter ... 7.4mm

Stock No.	Part No.	Bore Size	For Hose	Box Qty	Price each
54422	A7109	4mm	4mm	-	£2.96D
54423	A7110	6mm	6mm	-	£2.96D
54424	A7111	8mm	8mm	-	£2.96D
54425	A7112	10mm	10mm	-	£2.96D
54426	A7113	13mm	13mm	-	£2.96D

Make sure you use PCL fittings with all your air tools and compressors. This will ensure trouble-free running and long life.



**Important Box Qty info:** For your convenience we recommend ordering in box quantity or multiples of box quantity where shown. You can still order in any quantity unless specifically stated otherwise.